


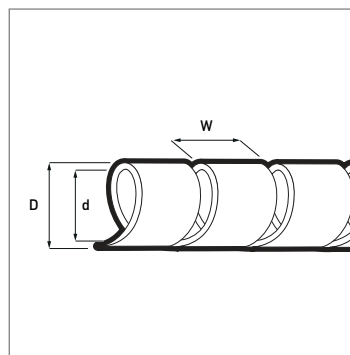

COLOR

- Black
- Natural

MATERIAL

LDPE

PACKAGING

Plastic bag

CONTINUOUS OPERATING TEMPERATURE

Installation temperature:

-50°C ÷ +85°C

APPLICATIONS

- Cable bundling
- Very flexible
- Quick installation
- Halogen free

Technical data and packaging

CODE		DIMENSION			Helix (mm) H	BUNDLING CAPACITY		PACKAGING bag (m)
		internal diameter (mm) D	outer diameter (mm) d	wall thickness (mm) W		min. diameter (mm)	max. diameter (mm)	
SP-2	SP-2N	2,3	3,5	0,6	5	3	15	50
SP-4	SP-4N	3,7	5	0,65	7	4	20	25
SP-6	SP-6N	6,5	8	0,75	10	7	40	25
SP-9	SP-9N	8,2	10	0,85	12	9	50	25
SP-12	SP-12N	10	12	1	14	11	70	25
SP-15	SP-15N	12	14	1	16	13	80	20
SP-20	SP-20N	17,6	20	1,2	22	18	120	25
SP-25	SP-25N	22,2	25	1,4	27	23	150	20

Technical properties

PHYSICAL PROPERTIES			
Description	test method	typical value	UM
Tensile strength	-	11,45	N/mm ²
Ultimate Elogation	-	500	%
Water absorption	-	0,1	%
Specific Gravity at 23°C	ISO 1183-2	0,92	-

ELECTRICAL PROPERTIES			
Description	test method	typical value	UM
Dielectric strength	ASTM D 2671	25	kV/mm

THERMAL PROPERTIES			
Description	test method	typical value	UM
Melting point	-	105 to 115	°C
Flammability	UL94	HB	-

OTHER PROPERTIES			
Description	test method	typical value	UM
Chemical resistance (acid/ base)	-	good	-